

Power-PRO™ IT

powered incubator
transport



Power-PRO™ IT

powered incubator transport

Reduce the risk of injuries when raising and lowering incubator cots

Stryker Power-PRO technology makes delicate transfers easier.

Stop heavy lifting. The Power-PRO IT incubator transport cot provides stability and safety while reducing the risk of caregiver back strain and lost time due to injuries.


- The innovative battery-powered hydraulic system raises and lowers the cot with the touch of a button.³
- Allows unprecedented maneuverability in any situation with its exclusive rigid push bars.
- Utilizes an easy-to-use manual back-up system for all powered cot functions.
- Exclusive automatic high-speed retract feature saves precious seconds when loading and unloading.



Power-LOAD™ Compatibility

An industry first, our Power-LOAD cot fastener system helps improve safety to you and your patients by lifting and lowering the Power-PRO IT cot into and out of the ambulance—helping to reduce spinal loads that result in cumulative trauma failure. The Power-LOAD cot compatibility option allows the Power-PRO IT to be fully compatible with the Power-LOAD system. This system will automatically charge the Power-PRO IT SMRT battery.

Incubator Compatibility options

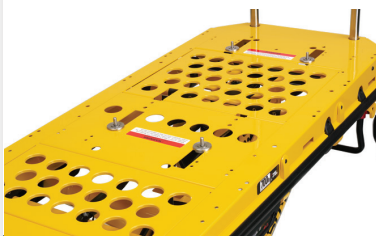


Airborne Stackable

- Four bolt adapters
- Two bracket adapters (optional with extension litter only)
- Rigid push bars (optional)
- Extension litter (optional)



Airborne Side-by-Side

- Four bolt adapters
- Two bracket adapters
- Rigid push bars (foot end only)

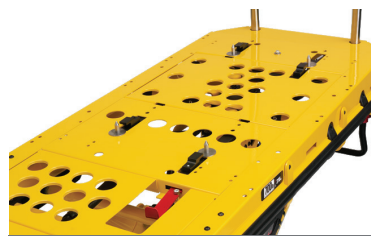


Dräger Stackable

- Four latching pin adapters
- Rigid push bars (optional)
- Extension litter (optional)



No Adapter Option

- Designed to be compatible with airsled or equivalent configurations. Check with your manufacturer for details.
- Rigid push bars (optional)
 - Extension litter (optional)

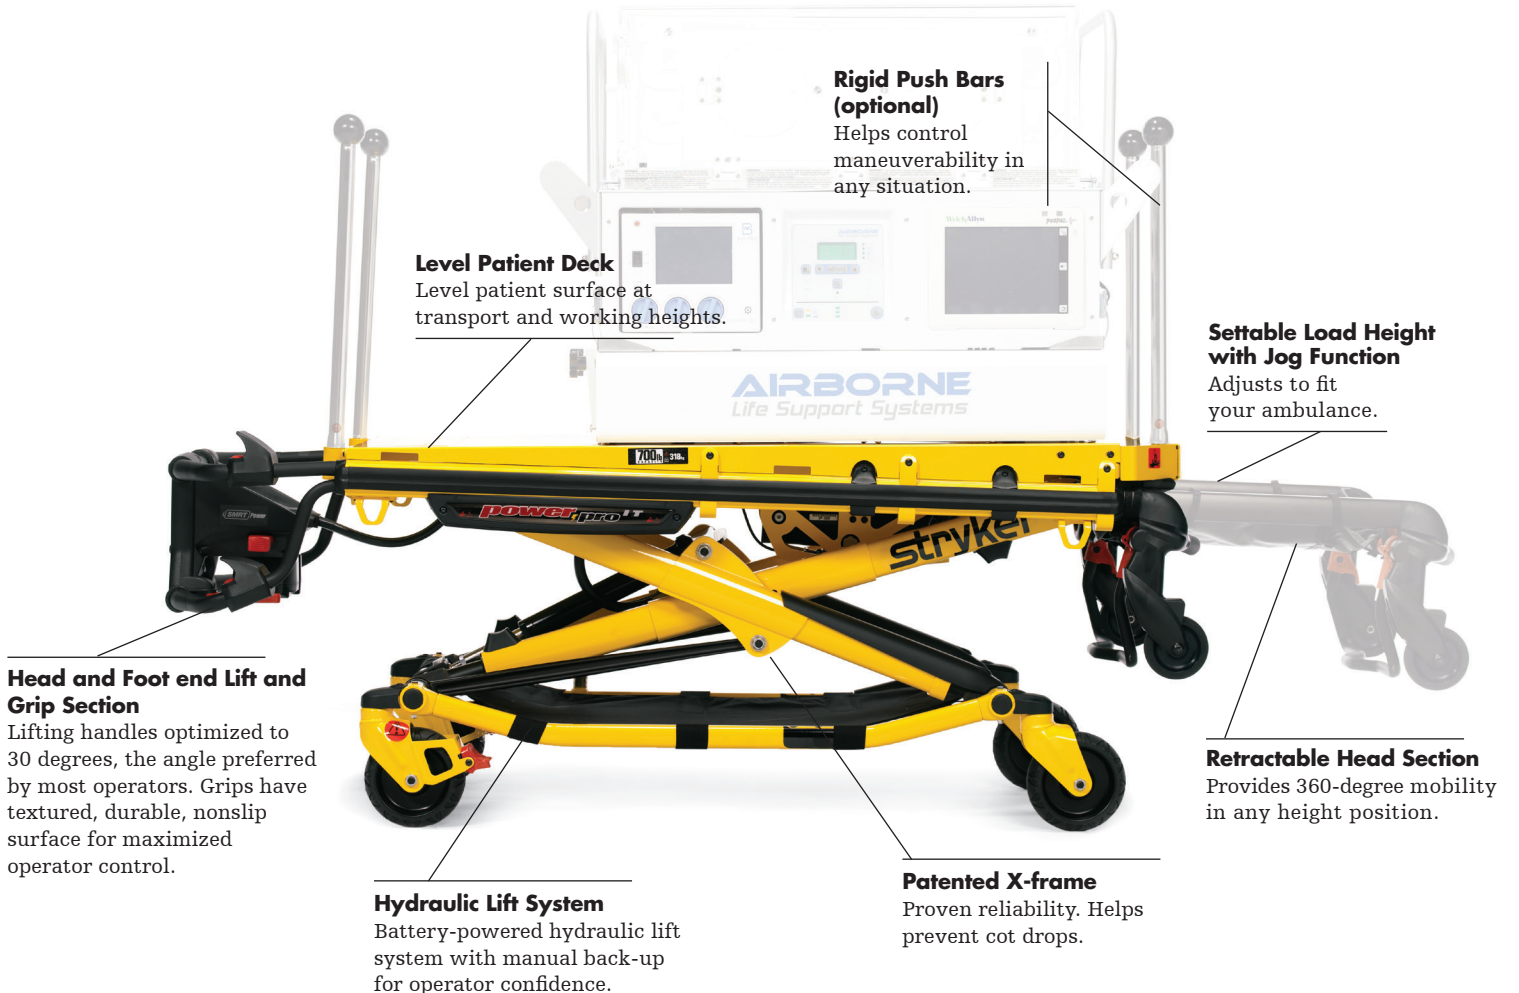

Rigid Push Bars (optional)
Helps control maneuverability in any situation.

Level Patient Deck
Level patient surface at transport and working heights.

Settable Load Height with Jog Function
Adjusts to fit your ambulance.

Head and Foot end Lift and Grip Section
Lifting handles optimized to 30 degrees, the angle preferred by most operators. Grips have textured, durable, nonslip surface for maximized operator control.

Retractable Head Section
Provides 360-degree mobility in any height position.

Hydraulic Lift System
Battery-powered hydraulic lift system with manual back-up for operator confidence.

Patented X-frame
Proven reliability. Helps prevent cot drops.

700lb
capacity


Side-by-Side Configuration
Accommodates side-by-side configuration.

Stacked Configuration
Accommodates stacked configuration, maximizing available storage space.

Extension Litter (optional)
Provides additional storage space.



Safety Bar Release Handles
The retractable head section with safety bar has conveniently located release handles that retract the head section into the cot. The safety bar release is designed to keep hands away from the cot mechanism for safety.

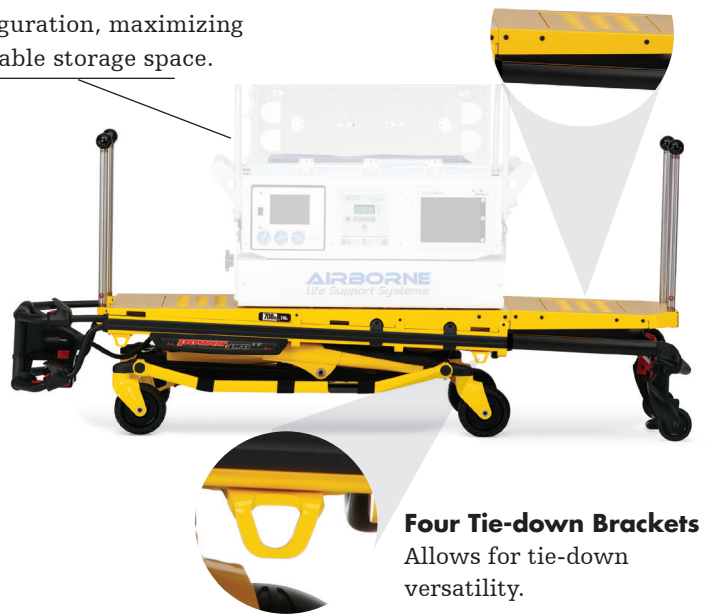

Four Tie-down Brackets
Allows for tie-down versatility.

Specifications

Model Number	6516
Height¹ (infinite height positioning between lowest and highest position)	
Highest Position	41.5 in (105 cm)
Lowest Position	14 in (36 cm)
Length	
Minimum	63 in (160 cm)
Maximum	81 in (206 cm)
Width	23 in (58 cm)
Weight²	134 lb (61 kg)
Wheels	
Diameter	6 in (15 cm)
Width	2 in (5 cm)
Maximum Weight Capacity³	700 lb (318 kg)
Minimum Operators Required	
Occupied Cot	2
Unoccupied Cot	1
Recommended Fastener System	
Power-LOAD Model 6390	
Floor Mount	Model 6370 or 6377
Wall Mount	Model 6371
Recommended Loading Height⁴	Up to 36 in (91 cm)

¹ Height measured from the top of cot, at the center point, to ground level.

² Cot is weighed with one battery pack, without incubator.

³ 700 lb weight capacity with an unassisted lift capacity of 500 lb (Cot loads over 300 lb (136 kg) may require additional assistance to

meet the set cot load height).

⁴ Can accommodate load decks up to 36 in. Load height can be set between 66 cm and 91 cm.

Stryker reserves the right to change specifications without notice.

In-service video included with each order.

The Power-PRO IT is recognized by Underwriters Laboratory to IEC-60601-1.

The Power-PRO IT is designed to conform to Federal Specification for the Star-of-Life Ambulance KKK-A-1822.

The Power-PRO IT is designed to be compatible with competitive cot fastener systems.

Technical Support

Stryker Technical Support comprises a team of professionals available to help with your Performance-LOAD needs. Contact via phone at 1 800 STRYKER or email at TechnicalSupport@Stryker.com.

ProCare Service from Stryker

With maintenance, service and work-flow solutions that proactively maintain your equipment, we help you get every last penny out of your investment. Two-hour priority response callback time and 24- to 72-hour product turnaround help you focus more on your patients and less on equipment upkeep.

Flex Financial Program

Our financial programs provide a range of smart alternatives designed to fit your organization's needs. We offer flexibility beyond a cash purchase with payment structures customizable to meet budgetary needs and help to build long-term financial stability. Specialized finance solutions for municipalities and other government agency businesses are also available.

To learn more about the wide range of financial services, call 1 888 308 3146.

Stryker Corporation or its divisions or other corporate affiliated entities own, use or have applied for the following trademarks or service marks: **Flex Financial, Power-PRO, ProCare, Stryker**.

All other trademarks are trademarks of their respective owners or holder.

The yellow and black color scheme is a registered trademark of the Stryker Corporation.

Mkt Lit-144-01 Jun 2006 Rev F.1

Copyright © 2017 Stryker

Printed in U.S.A.

3800 E. Centre Ave.
Portage, MI 49002 U.S.A.

t: 269 329 2100
f: 866 795 2233
toll free: 800 327 0770

ems.stryker.com

