

T/Pump®

Localized Therapy System




Safe and effective localized warming and cooling therapy

The T/Pump system provides safe and effective localized warming and cooling therapy with precise temperature control. Simple and versatile, T/Pump is effective for chronic pain relief and patient comfort in orthopedic conditions, skin trauma and a number of other applications to meet the needs of an ever-changing patient population. The large, translucent reservoir and large buttons make operation simple.



The T/Pump stand provides ease of transporting to patient rooms and offers storage for pads and accessories. An IV pole mount plate is also available as a space-saving solution.

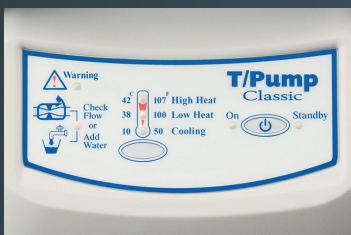

Multiple temperature settings and treatment cycles allow for therapy that is customized to patient needs. Large buttons and LED indicators make operation simple and intuitive.



Extra wide leakproof cap includes a tethered strap to prevent cap loss. Simply fill with tap water for warming or tap water and ice for cooling.

Conveniently operates with tap water without the need for sterile or distilled water.

Three-layer safety system helps ensure safe operation.

T/Flash technology provides a slight temperature change, providing patients with an "always there" feeling that the product is working.

Ergonomic design with comfortable handle makes transport easy.

Audible and visible alarms alert caregivers to low water or internal issues.

Large translucent reservoir has a large capacity and allows users to determine water levels at a glance.

T/Pump

Localized Therapy System



Standard features

- 8.5' power cord
- Hospital grade plug
- 93 oz (2750 mL) reservoir
- Large fill port (1-7/8" diameter)
- Wet or dry storage

Optional accessories

- TPS2 temperature therapy stand with storage basket and cord hooks

Optional test accessories

- TPT9 flow meter
- Test probe assembly

Connector options

- Klik-Tite Connectors are leakproof and multiple pads can be connected to one unit for multiple therapy sites
- 600 Series Mul-T-Pad water-circulating pads offer quick disconnect colder style connectors for increased adaptability with TP700C models

Specifications

Model number	TP700, TP700C*
Height	11.5" (29 cm)
Width	8" (20 cm)
Depth	8" (20 cm)
Weight	
Full (filled to heating water line)	9.3 lbs (4.2 kg)
Empty	6.7 lbs (3 kg)
Temperature range	10 °C-42 °C (50 °F-107 °F)
Accuracy	±2 °F (1 °C)
Fluid system	9 gph flow rate min.

Electronics

Volts 120 VAC, 3.1 amps, 60 Hz, 20µA typical leakage current

Safety UL approved to UL60601-1 and ASTM F2196

Warranty

1 year

Medicare reimbursement HCPC E0217

Optional Mul-T-Pads

	Part number	Dimensions
Lightweight, single patient use with Klik-Tite connectors		
Pliable polymer/nonwoven fabric on one side	8002-062-012	13" x 18" (33 x 46 cm)
Pliable polymer/nonwoven fabric on one side	8002-062-022	15" x 22" (38 x 56 cm)
Pliable polymer/non woven fabric on one side	8002-062-026	18" x 26" (46 x 66 cm)
Reusable		
Heavy duty pliable polymer	8002-062-222	15" x 22" (38 x 56 cm)
600 series, single patient use with colder style connectors		
Polymer/nonwoven fabric on both sides	8002-062-612	13" x 18" (33 x 46 cm)
Polymer/nonwoven fabric on both sides	8002-062-622	15" x 22" (38 x 56 cm)
Polymer/nonwoven fabric on both sides	8002-062-626	18" x 26" (46 x 66 cm)

Mkt Lit-520 020411 Rev D.4
Copyright © 2017 Stryker
Printed in U.S.A.

3800 E. Centre Avenue
Portage, MI 49002 USA
t: 269 329 2100
toll free: 800 327 0770

patienthandling.stryker.com

Stryker reserves the right to change specifications without notice.

*TP700 have Klik-Tite Connectors. TP700C have Colder style Connectors.

Stryker Corporation or its divisions or other corporate affiliated entities own, use or have applied for the following trademarks or service marks: Mul-T-Pad, T/Pump, Stryker. All other trademarks are trademarks of their respective owners or holder.