

Specifications

Model Number	6516
Height <sup>1</sup> (infinite height positioning between lowest and highest position)	
Highest Position	41.5 in (105 cm)
Lowest Position	14 in (36 cm)
Length	
Minimum	63 in (160 cm)
Maximum	81 in (206 cm)
Width	23 in (58 cm)
Weight <sup>2</sup>	134 lb (61 kg)
Wheels	
Diameter	6 in (15 cm)
Width	2 in (5 cm)
Maximum Weight Capacity <sup>3</sup>	700 lb (318 kg)
Minimum Operators Required	
Occupied Cot	2
Unoccupied Cot	1
Recommended Fastener System	
Floor Mount	Model 6370, 6377 or 6378
Wall Mount	Model 6371
Recommended Loading Height <sup>4</sup>	Up to 36 in (91 cm)

<sup>1</sup> Height measured from the top of cot, at the center point, to ground level.

<sup>2</sup> Cot is weighed with one battery pack, without incubator.

<sup>3</sup> 700 lb weight capacity with an unassisted lift capacity of 500 lb (Cot loads over 300 lb (136 kg) may require additional assistance to meet the set cot load height).

<sup>4</sup> Can accommodate load decks up to 36 in. Load height can be set between 66 cm and 91 cm.

Stryker reserves the right to change specifications without notice.

In-service video included with each order.

The Power-PRO IT is recognized by Underwriters Laboratory to IEC-60601-1.

The Power-PRO IT is designed to conform to Federal Specification for the Star-of-Life Ambulance KKK-A-1822.

The Power-PRO IT is designed to be compatible with competitive cot fastener systems.

Stryker Corporation or its divisions or other corporate affiliated entities own, use or have applied for the following trademarks or service marks: **ProCare, Stryker**. All other trademarks are trademarks of their respective owners or holder. The yellow and black color scheme is a registered trademark of the Stryker Corporation.

Mkt Lit-144-01 Jun 2006 Rev F.1  
Copyright © 2018 Stryker  
Printed in U.S.A.

3rd floor, Business Center SkyLight, Tower “B”  
39/80 Leningradsky Prospect  
Moscow, 125167  
Russia

t: 7 495 785 0718

ems.stryker.com



Power-PRO™ IT  
powered incubator  
transport



# Power-PRO™ IT

powered incubator transport

## Reduce the risk of injuries when raising and lowering incubator cots

Stryker Power-PRO technology makes delicate transfers easier.

Stop heavy lifting. The Power-PRO IT incubator transport cot provides stability and safety while reducing the risk of caregiver back strain and lost time due to injuries.

- The innovative battery-powered hydraulic system raises and lowers the cot with the touch of a button.<sup>3</sup>
- Allows unprecedented maneuverability in any situation with its exclusive rigid push bars.
- Utilizes an easy-to-use manual back-up system for all powered cot functions.
- Exclusive automatic high-speed retract feature saves precious seconds when loading and unloading.

## Incubator Compatibility options




**Airborne Stackable**

- Four bolt adapters
- Two bracket adapters (optional with extension litter only)
- Rigid push bars (optional)
- Extension litter (optional)



**Airborne Side-by-Side**

- Four bolt adapters
- Two bracket adapters
- Rigid push bars (foot end only)



**Dräger Stackable**


- Four latching pin adapters
- Rigid push bars (optional)
- Extension litter (optional)



**No Adapter Option**

Designed to be compatible with airsled or equivalent configurations. Check with your manufacturer for details.

- Rigid push bars (optional)
- Extension litter (optional)



**Rigid Push Bars (optional)**  
Helps control maneuverability in any situation.

**Level Patient Deck**  
Level patient surface at transport and working heights.

**Settable Load Height with Jog Function**  
Adjusts to fit your ambulance.


**Retractable Head Section**  
Provides 360-degree mobility in any height position.

**Patented X-frame**  
Proven reliability. Helps prevent cot drops.


**Hydraulic Lift System**  
Battery-powered hydraulic lift system with manual back-up for operator confidence.

**Head and Foot end Lift and Grip Section**  
Lifting handles optimized to 30 degrees, the angle preferred by most operators. Grips have textured, durable, nonslip surface for maximized operator control.


**700lb capacity**

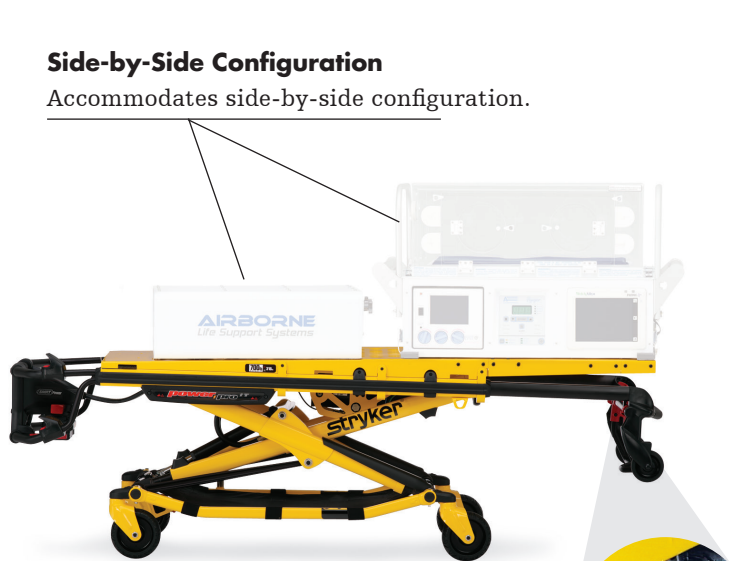


**Side-by-Side Configuration**  
Accommodates side-by-side configuration.




**Safety Bar Release Handles**  
The retractable head section with safety bar has conveniently located release handles that retract the head section into the cot. The safety bar release is designed to keep hands away from the cot mechanism for safety.



**Stacked Configuration**  
Accommodates stacked configuration, maximizing available storage space.



**Extension Litter (optional)**  
Provides additional storage space.



**Four Tie-down Brackets**  
Allows for tie-down versatility.